


# Chase Flexible Doors



Flexible doors are the original swing traffic door. The hinging system has no lower fastening points, rods, bearings or attachments, allowing the full width of the opening to be used and eliminating potential damage in abusive applications. All Chase flexible doors are custom manufactured to your specific opening size requirements.

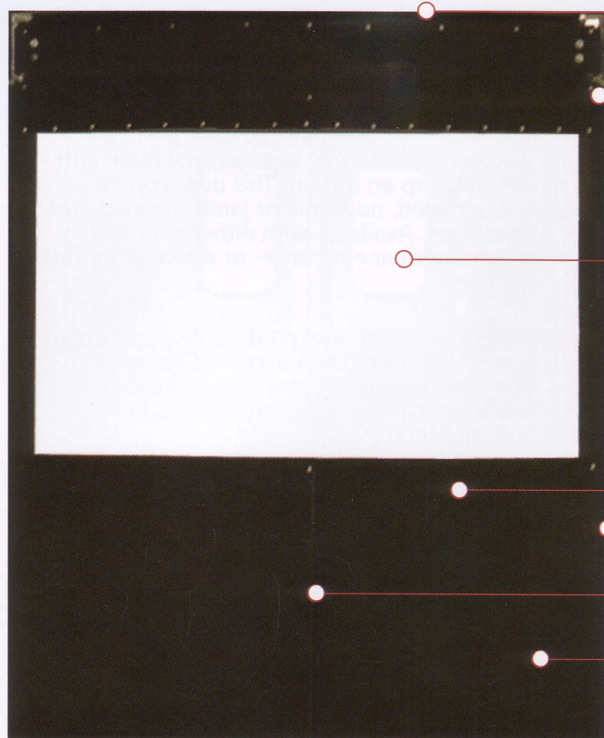

Model 973 XHD

**Wipers** – For a positive seal, balloon gasket jamb seals of reinforced vinyl with sweep gaskets at the top and bottom are provided.

**Hinge** – The door comes standard with hinge pockets constructed of USDA accepted abrasion resistant 2-ply 1/4" conveyor belting material. The hinge is Chase standard top-mounted gravity hinging system that opens instantly upon contact, then closes automatically by gravity. A corrosion-resistant hinge system is available as an option.


**Windows** - The viewing area is extra large to allow clear visibility and maximum safety.

**Door Panel** – The AirGard 973 XHD is considered to be the heaviest duty flexible door in the industry. The key to its durability is its construction design. The door panel consists of a .375" thick, clear PVC body with perimeter framework of vinyl coated nylon material. This door is suitable for low temperature applications to -30°F. Optional Meat rail cutouts and magnets are available.

**Jamb Edge** – 2" balloons are provided on the jamb edge for a superior seal that saves energy.


**Leading Edge** – 3" overlap at the center provides a noise and temperature barrier.

**Impact Plates** – 48" high USDA accepted two-ply 1/4" conveyor belting impact plates on both sides of the door panel are used to increase the strength and durability of the door panel. Layers are bonded together without the use of stitching, eliminating the possibility of contamination.



### AirGard Model 973


- Built for the toughest applications these doors are constructed with a .160" thick PVC door body, and a two-ply vinyl coated nylon bracket pocket. Embossed finish resists scratches, scuffs and abrasions. **Not suitable for freezer applications.**
- For a positive seal, balloon jamb edge seals and top and bottom wipers are provided.
- 3" overlap at the center on bi-parting doors provides a noise and temperature barrier.
- 48" high USDA accepted textured vinyl impact plates on both sides of the door panel are used to increase the strength and durability of the door panel.
- The viewing area is extra large to allow clear visibility and maximum safety.
- Standard with the Chase top-mounted gravity hinging system that opens instantly upon contact, then closes automatically by gravity.



### Top Mounted Gravity Hinge

The "original" top mounted gravity-operated hinge system allows the door to open fully and close automatically. Optional bracket arm adjustment feature compensates for jambs that are not plumb.

### Colors Available for AirGard 973 XHD



Forest Green    Black

### Colors Available for AirGard 973



Forest Green    Navy    Red    Black    Med. Brown    Chocolate Brown    Metallic Gray    Royal Blue

Color shown may differ from actual color  
Consult factory for exact color match.

Applications	Environment	Options
<ul style="list-style-type: none"> <li>• Food Processing</li> <li>• Industrial</li> <li>• Institutional</li> <li>• Warehouse</li> </ul>	<ul style="list-style-type: none"> <li>• Freezer</li> <li>• Cooler</li> <li>• USDA Accepted</li> <li>• Personnel</li> <li>• Interior</li> </ul>	<ul style="list-style-type: none"> <li>• Window Options</li> <li>• Impact/ Kick Plates</li> <li>• Hinge Options</li> </ul>